

CLASS 125 CAST IRON, WAFER TYPE CHECK VALVES

Fig: 445/125-FNW

Sizes: 2-12inch(50-300mm)

(SEAT:NBR)

Standards

. End to End: MANUFACTURES STANDARD

. End Connection: WAFER TYPE (CLASS 125)

. Wall Thickness: MANUFACTURES STANDARD

Test Standard

. MANUFACTURES STANDARD

Dimensions

SIZE (inch/mm)	L	L1	H	D1	Kg
2 50	56.0	0.0	0.0	0.0	0.00
2 1/2 65	56.0	0.0	0.0	0.0	0.00
3 80	59.0	0.0	0.0	0.0	0.00
4 100	66.0	0.0	0.0	0.0	0.00
5 125	72.0	0.0	0.0	0.0	0.00
6 150					
8 200					
10 250					
12 300					

Material List

NAME OF PART	MATERIAL	SPECIFICATION
BODY	CAST IRON+NBR	FC250+NBR


Specifications

CLASS 125 CAST IRON, WAFER TYPE CHECK VALVES, (SEAT:NBR)

End to End : MANUFACTURES STANDARD, End Connection : WAFER TYPE (CLASS 125), Wall Thickness : MANUFACTURES STANDARD, Test Standard

: MANUFACTURES STANDARD, Sizes : 2-12inch(50-300mm), BODY MATERIAL

: CAST IRON+NBR, Fig : 445/125-FNW

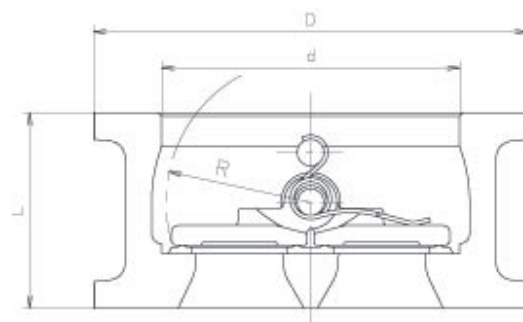

For more details, please refer to the drawing.

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.