

5/10KALUMINUM BUTTERFLY VALVES,CENTER DRIVE DISC

Fig: 550LA/10ALM-N-LU

Sizes: 11/2-6inch(40-150mm)

LEVER OPERATED.

Standards

- End to End: JIS B2032 46 SERIES (2)
- End Connection: WAFER TYPE (JIS 5/10K)
- Wall Thickness: MANUFACTURES STANDARD

Test Standard

- JIS B 2032

Dimensions

SIZE (inch/mm)	L	L1	H	D1	Kg
11/2 40	33.0	0.0	163.0	188.0	0.00
2 50	43.0	0.0	167.0	188.0	0.00
2 1/2 65	46.0	0.0	175.0	188.0	0.00
3 80	46.0	0.0	185.0	188.0	0.00
4 100	52.0	0.0	195.0	188.0	0.00
5 125	56.0	0.0	239.0	260.0	0.00
6 150	56.0	0.0	251.0	260.0	0.00


Material List

NAME OF PART	MATERIAL	SPECIFICATION
BODY	ALUMINUM DIE-CAST	ADC12
STEM	STAINLESS STEEL	SUS410
SEAT RUBBER	NBR	

Specifications

5/10KALUMINUM BUTTERFLY VALVES,CENTER DRIVE DISC, LEVER OPERATED.

End to End : JIS B2032 46 SERIES (2), End Connection : WAFER TYPE (JIS 5/10K), Wall Thickness : MANUFACTURES STANDARD, Test Standard : JIS B 2032, Sizes : 11/2-6inch(40-150mm), BODY MATERIAL : ALUMINUM DIE-CAST, STEM MATERIAL : STAINLESS STEEL, SEAT RUBBER MATERIAL : NBR, Fig : 550LA/10ALM-N-LU

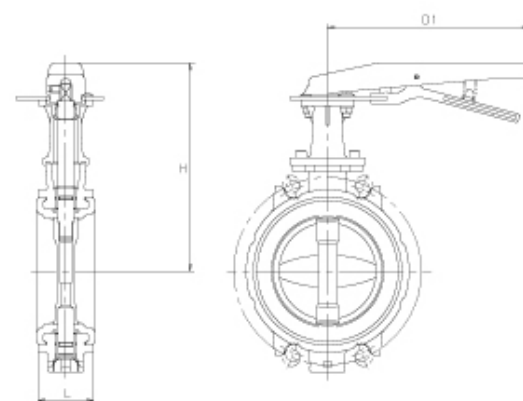

For more details, please refer to the drawing.

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.



Toyo Valve

KITZ CORPORATION Tokyo Shiodome Building, 1-9-1, Higashi-Shimbashi, Minato-ku, Tokyo 105-7305, Japan
© KITZ Corporation. All Right Reserved.

